



ED-Pi5Case-O(S/B)

Raspberry Pi 5 Passive Cooling Open Aluminum CNC Case

- Low cost, high quality and beautiful open case by aluminum CNC cut, oxidized surface finish
- Both top and bottom case provide passive cooling for Raspberry Pi 5 though thermal pads & aluminum body
- Excellent cooling performance can keep CPU, PMU and wireless module cool, and the CPU temperature can be reduced by up to 15°C
- Strong WiFi/BT wireless connectivity with open case design
- All interfaces are accessible
- Available in various colors including silver and black

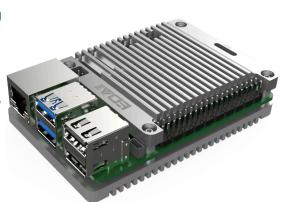


Dimensions

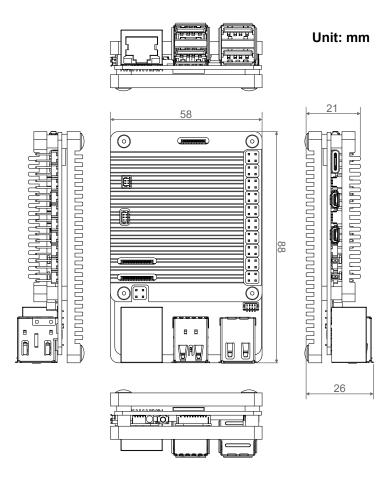



Ordering Code

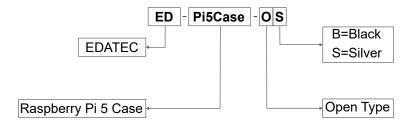

Example

P/N: ED-Pi5Case-OS

Configuration: Silver Raspberry Pi 5 Passive Cooling Open Aluminum CNC Case.

Packing List

- 1 x ED-Pi5Case-O(S/B) Top Cover
- 1 x ED-Pi5Case-O(S/B) Bottom Cover(4 x pads have been installed)
- 1 x Accessory Set(With 4 x M2.5*11 screws and 1 x 1.5mm allen key)

Installation


Note:


• Before you start installing your Raspberry Pi 5, please remove the White Protective Paper from thermal silicone in the case.





• Before you start installing your Raspberry Pi 5, please check whether the tops of 4 nylon posts in the top cover are on the same level. If there are some tops that are higher than others, please press the higher tops into the mounting holes.



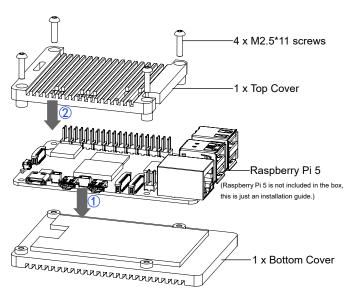



- ①Align Raspberry Pi 5 with the reserved holes on Bottom Cover and place it on Bottom Cover.
- ②Put **Top Cover** down to cover **Raspberry Pi 5**, and insert 4 M2.5 screws into the holes. Then use the allen key to tighten the screws to fix **Top Cover**, **Raspberry Pi 5** and **Bottom Cover**.